

ISO9001:2015
ISO14001:2015



CL-LS Series Solar LED Street Light
Product Catalog



CY-LS30W
(5100lm)



CY-LS40W
(6800lm)



CY-LS50W
(8500lm)



CY-LS60W
(10000lm)




CY-LS80W
(13600lm)

Overview

Streamlined design.Higher efficacy LUMILEDS® LUXEON LED.PWM/MPPT controller is optional.Multiple optical designs ,better performance. Easy installation and maintenance.

CY-LS series Solar LED street light will provide the best lumen output,the best stability and very long lifetime. Provide over 5 years warranty for whole fixture.

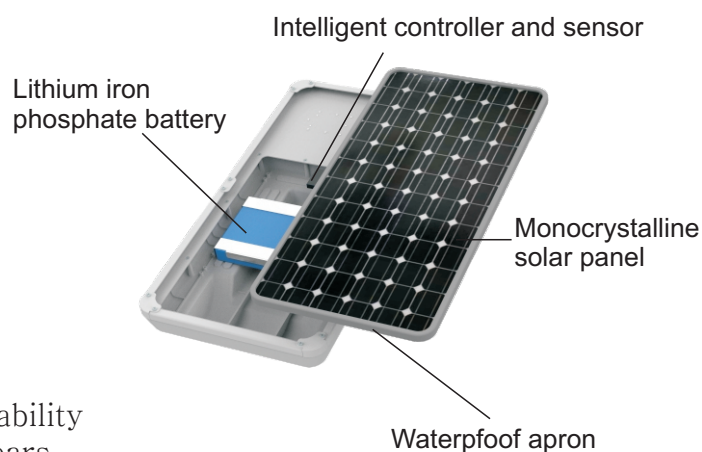


Colour

 Silver (other colors can be customized)



Working Principle

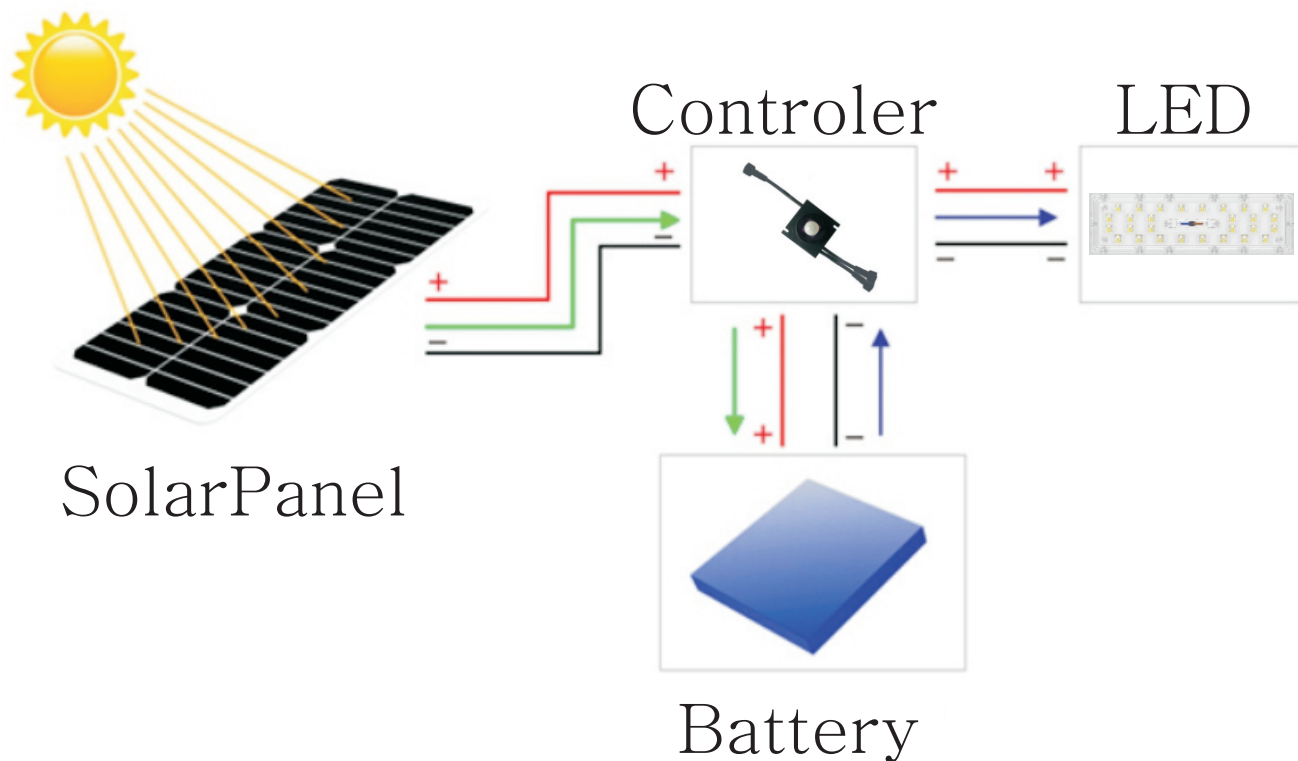

Feature


- Flexible selection of high lumen and high luminous flux, customized the best solution of luminaire according to local sunshine.
- Integrated design, easy installation, each component can be easily replaced and maintained, saving cost.
- The intelligent controller matches the PIR infrared or intelligent microwave sensor to ensure the effective lighting time of the lamp.
- Adopting high efficiency monocrystalline silicon and conversion rate of 19.8% solar panels, grade A1 26650 battery cells excellent Lithium iron phosphate battery.
- Using special plug connector, color design Fool-proofing, with anti-wrong connection function.
- Adopting adjustable mounted arm, can be adjusted in many angles, suitable for installation requirements of different latitude regions and different type poles.
- Professional waterproof design, protection grade IP66.
- Wind resistance rating 65m/s.

LED Source



Provide excellent lumen output, the best stability and excellent visual perception.
(Cree, Nichia, Osram & etc. is optional)

Solar Panel

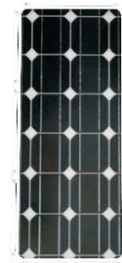


Monocrystalline solar panels,
Stable photoelectric conversion efficiency,
Advanced diffuse technology, which can ensure the uniformity of conversion efficiency.

LiFePO4 Battery



Excellent performance
High capacity
More safety,
Withstand high temperatures 60°C
Long lifespan, more than 2000 cycles.

MPPT Controller

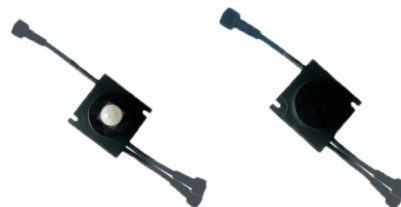


PIR

Microwave

Enable controller to track maximum charge efficiency.
Micro current charging function
Two options for PIR and Microwave Sensor

Plug-in Design

All the wires of the whole lamp are male and female plug-in connectors. The color is designed to be waterproof and has the functions of preventing errors.

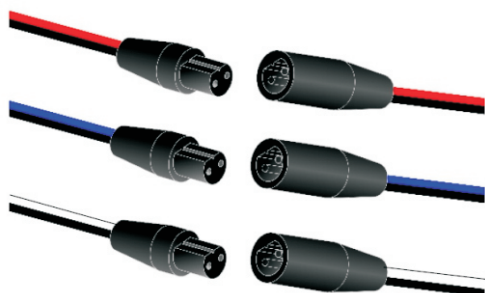

IP66 Protection




Waterproof apron


Installation




Adjusted Angle

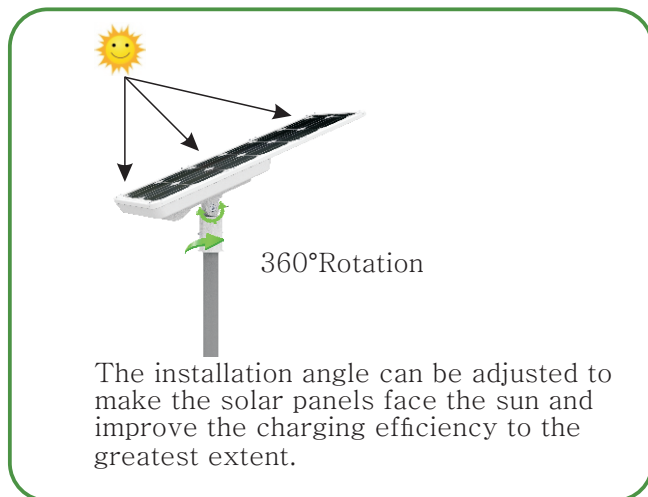


Multiple Lenses

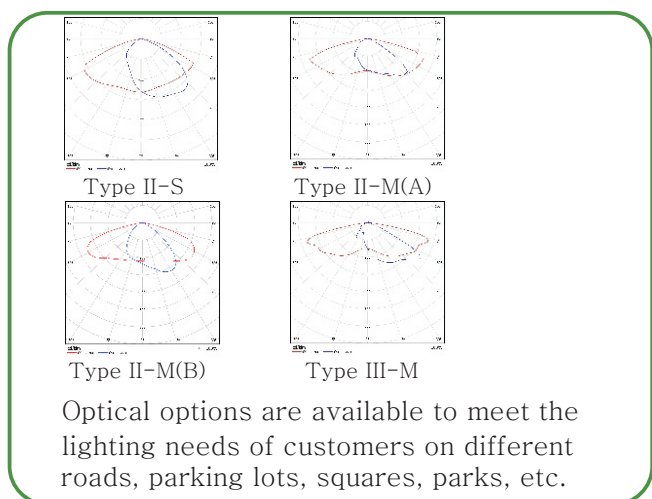


Convenient Maintenance

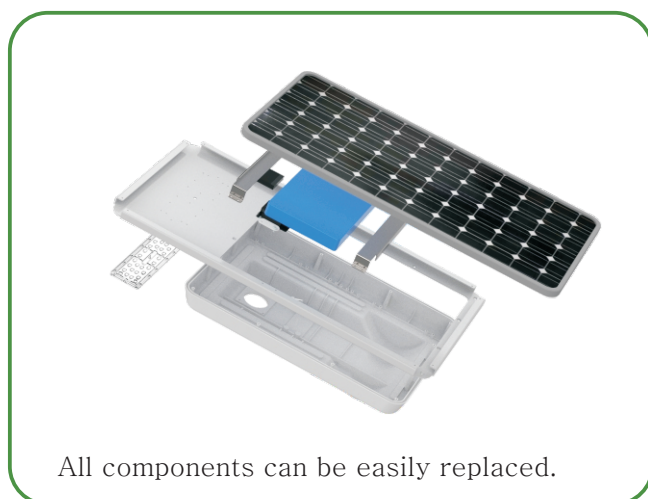

Networking Control

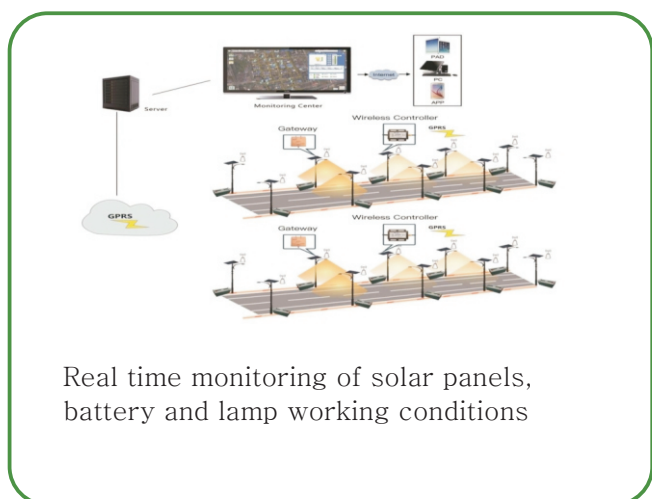


Sensor Control System

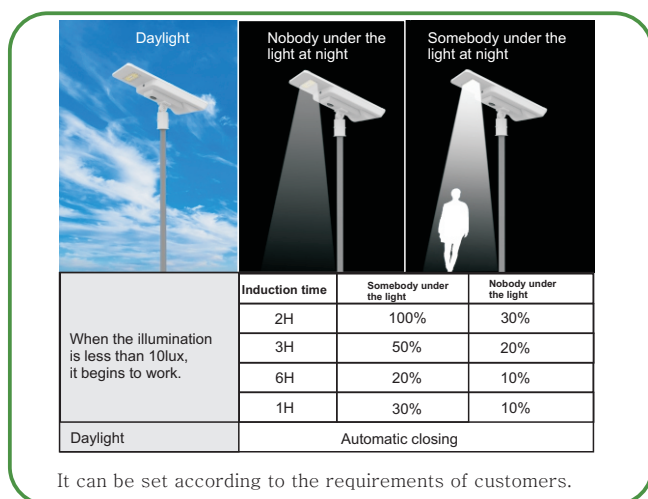


Product Parameters

ITEM	CY-LS30W	CY-LS40W	CY-LS50W
Solar Panel Parameters	Monocrystalline 18V 40W	Monocrystalline 18V 50W	Monocrystalline 18V 60W
Battery Parameters	LiFePO4 12.8V 18AH	LiFePO4 12.8V 24AH	LiFePO4 12.8V 27AH
System Voltage	12V	12V	12V
LED Brand	Lumileds	Lumileds	Lumileds
Light Distribution	II-S,II-M,III-M	II- S,II-M,III- M	II- S,II-M,III- M
CCT	2200K~6500K	2200K~6500K	2200K~6500K
Charge Time	6 Hours	6 Hours	6 Hours
Working Time	2-3 Days (Auto Control)	2-3 Days(Auto Control)	2-3 Days(Auto Control)
Protection Grade	IP66,IK09	IP66,IK09	IP66,IK09
Luminous Efficiency	170Lm/W	170Lm/W	170Lm/W
Operating Temperature	-20℃ to 60℃	-20℃ to 60℃	-20℃ to 60℃
Warranty	5 Years	5 Years	5 Years
Material	Aluminum	Aluminum	Aluminum
Luminous Flux	5100 lm	6800 lm	8500 lm
Nominal Power	30W	40W	50W
As The Market Similar Solar Light Power	40W	50W-60W	60W-70W


Size Data

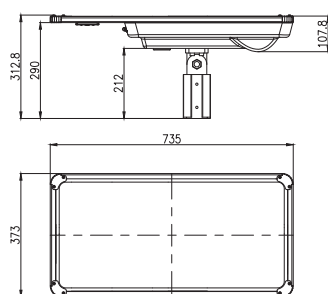

CY-LS30W

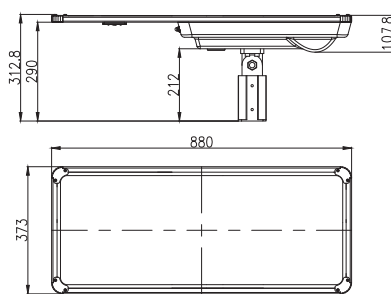

CY-LS40W

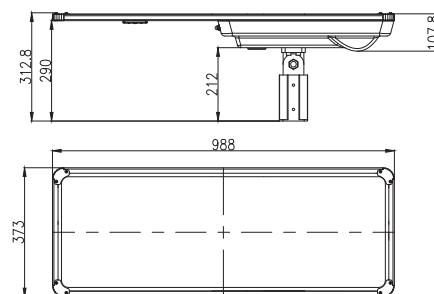


CY-LS50W




Product Parameters

ITEM	CY-LS60W	CY-LS80W
Solar Panel Parameters	Monocrystalline 18V 80W	Monocrystalline 18V 100W
Battery Parameters	LiFePO4 12.8V 33AH	LiFePO4 12.8V 42AH
System Voltage	12V	12V
LED Brand	Lumileds	Lumileds
Light Distribution	II-S,II-M,III-M	II-S,II-M,III-M
CCT	2200K~6500K	2200K~6500K
Charge Time	6 Hours	6 Hours
Working Time	2-3 Days (Auto Control)	2-3 Days(Auto Control)
Protection Grade	IP65,IK09	IP65,IK09
Luminous Efficiency	170Lm/W	170Lm/W
Operating Temperature	-20℃ to 60℃	-20℃ to 60℃
Warranty	5 Years	5 Years
Material	Aluminum	Aluminum
Luminous Flux	10000 lm	13600 lm
Nominal Power	60W	80W
As The Market Similar Solar Light Power	80W	100W

Size Data

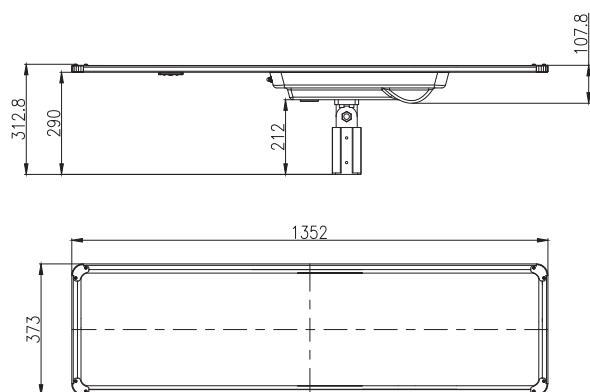

CY-LS60W

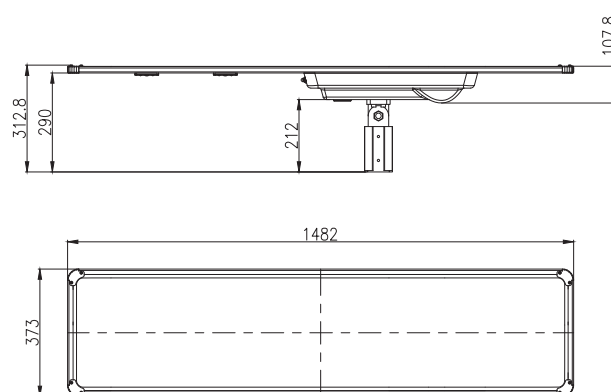

CY-LS80W

Practical Application

